

Model K

Multi-Stage Steam Turbine



The Dresser-Rand® Model K steam turbine is a cost-effective unit designed for commercial and industrial applications where moderate load and steam conditions prevail. With power requirements up to 7650 HP (5700 kW) and speeds to 10,000 RPM, the Model K steam turbine can be configured with one to nine stages to meet a wide range of steam conditions.

The Model K turbine should be considered wherever a steady power source is required over a wide speed range. Typical Model K turbine installations include chiller drives for universities, medical centers, and district energy applications, as well as drives for compressors, process compressors, centrifugal pumps, fans and blowers in the petroleum, petrochemical, paper, institutional, and food process industries.

Casing Design

A horizontally split casing with integral cast bearing bracket and heavy flanges give the Model K turbine added strength. The integral gland cases, containing the steam seals, provide a heavy gland boss at these points to maintain the integrity and strength in this critical area of the casing. The reinforcing boss permits additional steam seals to be used resulting in less steam loss and longer running times between seal changes. These and other design features help create an exceptionally rugged and reliable turbine.


Inlet Valves

The Model K turbine is designed with a single inlet valve with optional manual hand valves for steam flow control, and a wide selection of optional governors and accessories.

Overspeed Trip System

The overspeed trip system is a mechanical bolt action, non-sparking system operating an independent trip valve. A two-out-of-three electronic system with dual solenoid activation is available as needed.

The independent trip valve can be a high performance butterfly valve, or a Dresser-Rand mechanical latch, or a Gimpel™ oil-operated trip and throttle valve.

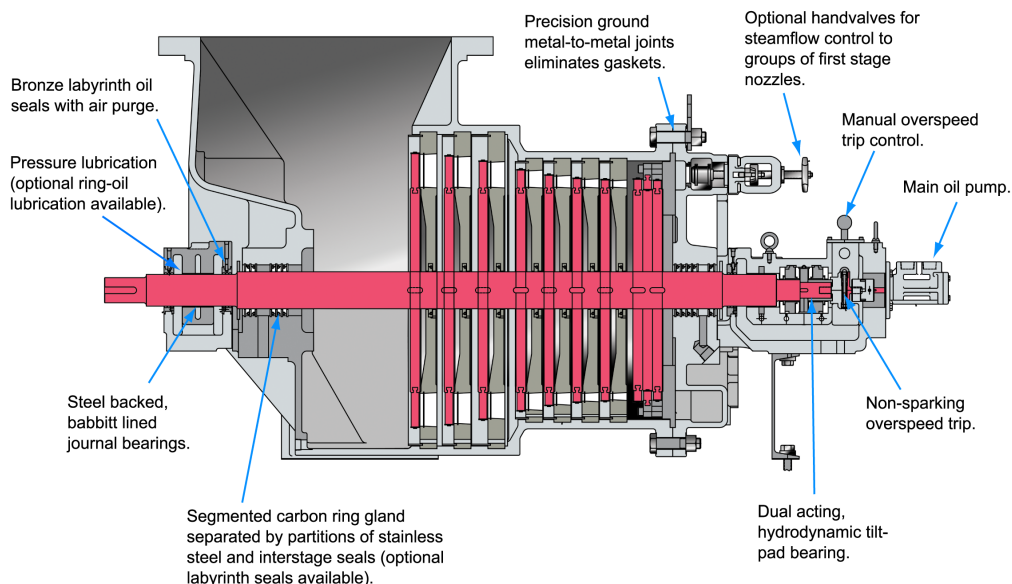

For more information on **Model K steam turbines** contact one of the following locations:

Dresser-Rand
P.O. Box 967
Burlington, Iowa 52601
Tel: 1-888-614-9168
Fax: 319-752-1616

Dresser-Rand
PO Box 102031
D-33520
Bielefeld, Germany
Tel: 49 521 1085-0
Fax: 49 521 1085-199

Dresser-Rand
37 Coats St. - PO Box 592
Wellsville, NY 14895
Tel: 1-800-828-2818
Fax: 585-593-5815

For a complete listing of products and services, visit us on the Internet at www.dresser-rand.com or contact one of the following Dresser-Rand locations.

Dresser-Rand Corporate Headquarters

West8 Tower Suite 1000
10205 Westheimer Road
Houston, TX 77042 USA
Tel: +1 713-354-6100
Fax: +1 713-354-6110
email: info@dresser-rand.com

Regional Headquarters

The Americas

Dresser-Rand
West8 Tower Suite 1000
10205 Westheimer Road
Houston, TX 77042 USA
Tel: +1 713-354-6100
Fax: +1 713-354-6110

European Served Areas

(Europe, Eurasia, Middle East, Africa)
Dresser-Rand S.A.
31 Boulevard Winston Churchill
Cedex 7013
Le Havre 76080 France
Tel: 33-2-35-25-5225
Fax: 33-2-35-25-5366 / 5367

Asia Pacific

Dresser-Rand Asia Pacific Sdn Bhd
Unit 8-1, 8th Floor
Bangunan Malaysian Re
17 Lorong Dungun, Damansara Heights
50490 Kuala Lumpur, Malaysia
Tel: 603-2093-6633
Fax: 603-2093-2622

These valve types provide quick-close, positive shut-off of the steam supply and comply with API 612 standards. The trip and throttle valve can function as a manually operated throttle valve for turbine start-up or shut-down.

Governors

The Model K turbine is typically supplied with the Woodward Peak 150 governor control system. It provides tight control of speed (NEMA D) and includes an input for a 4-20 mA remote speed control signal that can be used for a process-generated input to control the speed setting. Other features include dual-speed control dynamics and overspeed trip test capabilities.

Rotors, Seals, and Bearings

Rotors are available in a forged or built-up or integral design with a flexible or stiff shaft for up to nine stages. Labyrinth gland or inter-stage steam seals are provided to accommodate operating conditions or client preference.

Labyrinth-type oil seals retain pressure-fed lubrication in the bearing housings and prevent contamination from foreign material. Steam slingers also protect bearing housings from steam and condensate.

The Model K turbine incorporates dual-acting, hydrodynamic tilting pad thrust-bearing to position the rotor axially and absorb internal thrust. Exhaust- and steam-end bearing covers allow easy access to the bearing housing without removing the casing cover.

Additional Design Features:

- Up, down, or side exhaust orientation
- Back pressure or condensing with non-automatic extraction (bleed)

Specifications

Model	Power HP (kW)	Inlet Pressure psig _i (bar)	Inlet Temp °F (°C)	Exhaust psig _e (bar)	RPM
K	6500 (4850kW)	400 (28)	775 (412)	75 (5)	10,000
Inlet Diameter In (mm)	Exhaust Diameter In (mm)	Stages	Casing Design	Inlet Options	
8 (203)	39 (914)	9	Horizontally split	Hand valve	

©2007 Dresser-Rand. Printed in U.S.A.

This document comprises a general overview of the products described herein. It is solely for informational purposes, does not represent a warranty or guarantee of the information contained herein and is not to be construed as an offer to sell or a solicitation to buy. Contact Dresser-Rand for detailed design and engineering information suitable to your specific applications. Dresser-Rand reserves the right to modify its products and related product information at any time without prior notice.